

# Technische informatie

## Mini Jumbo



### Characteristics

- Supplied with one sealing bar as standard (front)
- Double seal as standard (two sealing wires).  
Optional at no extra cost: Cut-off/Wide seal
- Easy-to-remove sealing bar for easy cleaning
- Pump maintenance and cleaning program
- Digital time control with single program panel as standard
- Stainless steel casing and transparent lid
- Supplied with an insert plate for a faster cycle and good product positioning

### Options

- High lid
- Sensor control


### Accessories

- Inclined insert plate (for liquids and powders)
- External adapter
- Maintenance set
- Trolley with shelves



Specs	Mini Jumbo	
Chamber LxWxH (mm)	310x280x85	
Machine LxWxH (mm)	450x335x305	
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz	
Pump capacity 50 Hz/60 Hz (m3)	4 / 5	
Machine cycle 50 Hz/60 Hz (sec.)	18-67 / 16-59	
Power (kW)	0,1	
Weight (kg)	26	
Net seal length (mm)	263	
Sealing bar configuration - standard - option	standaard 	option 

### Dimensions mm

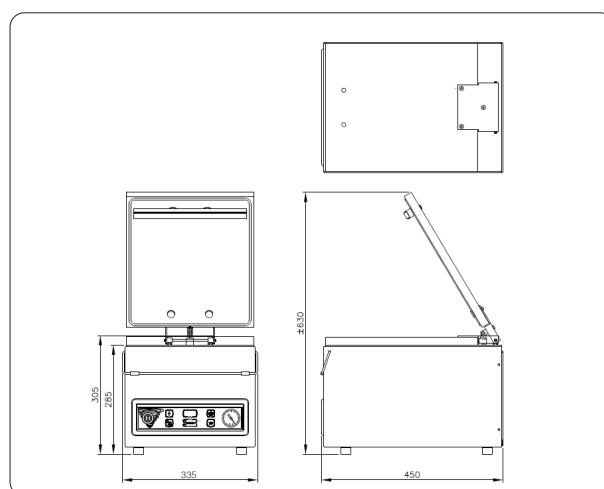

**Henkelman**  
vacuum packaging

**Henkelman BV**  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands  
+31 73 621 36 71

**Sales support**  
info@henkelman.com

**Service/technische support**  
service@henkelman.com