

**AERO 35+**  
**VACUUM PACKAGING MACHINE**



**FEATURES**

- Standard with 1 seal bar (front): 350 mm
- Standard double seal (two wires).
- Optional without extra costs:  
Cut-off/Wide seal
- Seal bar easily removable for cleaning and maintenance purposes
- Pump capacity: 16 m<sup>3</sup>/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-30 sec.
- Easy control interface
- Standard Sensor control with a 3 program memory
- Standard soft air
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with insert plate for a faster cycle and product adjustment

**OPTIONS**

- Liquid control

**ACCESSORIES**

- Inclined insert plate (for packing liquids)
- Food container adaptor
- Service kit for standard maintenance
- Trolley with shelf

**DESCRIPTION**

State of the art, innovative, robust machine with a slick design. Easy control interface. 3 adjustable setting programs. Standard Soft-air. Precise vacuum settings with sensor pressure control. This table-top model complies with CE standards.



Henkelman offers standard 3 year warranty

**SEAL BAR CONFIGURATION**

Standard




# VACUUM PACAGKING MACHINE AERO 35+ – SPECS

VACUUM PACKAGING MACHINE AERO 35+ – SPEC SHEET

## DIMENSIONS

In mm

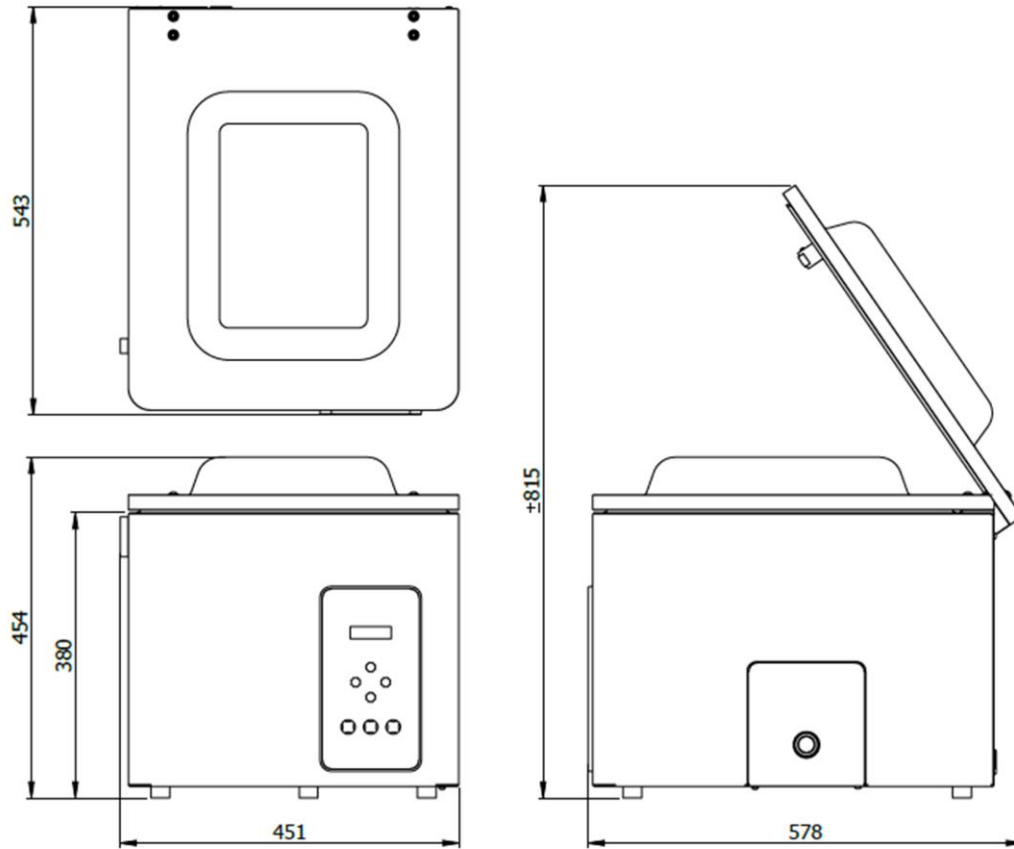

| Model    | Dimensions (mm)                  |                   | Voltage* (Hz) | Pump capacity (m <sup>3</sup> /h) | Power (kW) | Weight (kg) |
|----------|----------------------------------|-------------------|---------------|-----------------------------------|------------|-------------|
|          | Chamber (usable space) L x W x H | Machine L x W x H |               |                                   |            |             |
| AERO 35+ | 370 x 350 x 150                  | 543 x 451 x 454   | 230V-1-50     | 16                                | 0,6 kW     | 41          |

\* Other voltages available



**HENKELMAN BV**  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands

**Sales support**  
P +31 73 621 36 71  
E [info@henkelman.com](mailto:info@henkelman.com)  
**Service/technical support**  
P +31 73 621 36 71  
E [service@henkelman.com](mailto:service@henkelman.com)