

**BOXER 52II**

**VACUUM PACKAGING MACHINE**



**FEATURES**

- Standard with 2 seal bars (left-right): 2 x 410 mm
- Standard double seal (two wires). Optional without extra costs: Cut-off/Wide seal
- Seal bars easily removable for cleaning and maintenance purposes
- Pump capacity: 21 m<sup>3</sup>/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 20-40 sec
- Standard Digital control with Time control and a 10 program memory
- Standard Soft Air to protect the product and vacuum bag
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and transparent lid
- Comes with insert plate for a faster cycle and product adjustment

**OPTIONS**

- 1-2 Cut-off seal
- Sensor control/Advanced Control System
- Liquid control
- Gas flush


**ACCESSORIES**

- Zebra ZD410 thermal label printer (only in combination with Advanced Control System)
- Inclined insert plate (for packing liquids)
- Food container adaptor
- Service kit for standard maintenance

**DESCRIPTION**

The robust, stainless steel Boxer 52 II vacuum packaging machine is standard equipped with two seal bars, a Busch vacuum pump and Digital control with a 10 program memory. This table-top model complies with CE standards.

**SEAL BAR CONFIGURATION**




Henkelman offers standard 3 year warranty.

# VACUUM PACAGKING MACHINE BOXER 52II – SPECS

VACUUM PACKAGING MACHINE BOXER 52II – SPEC SHEET

## DIMENSIONS

In mm

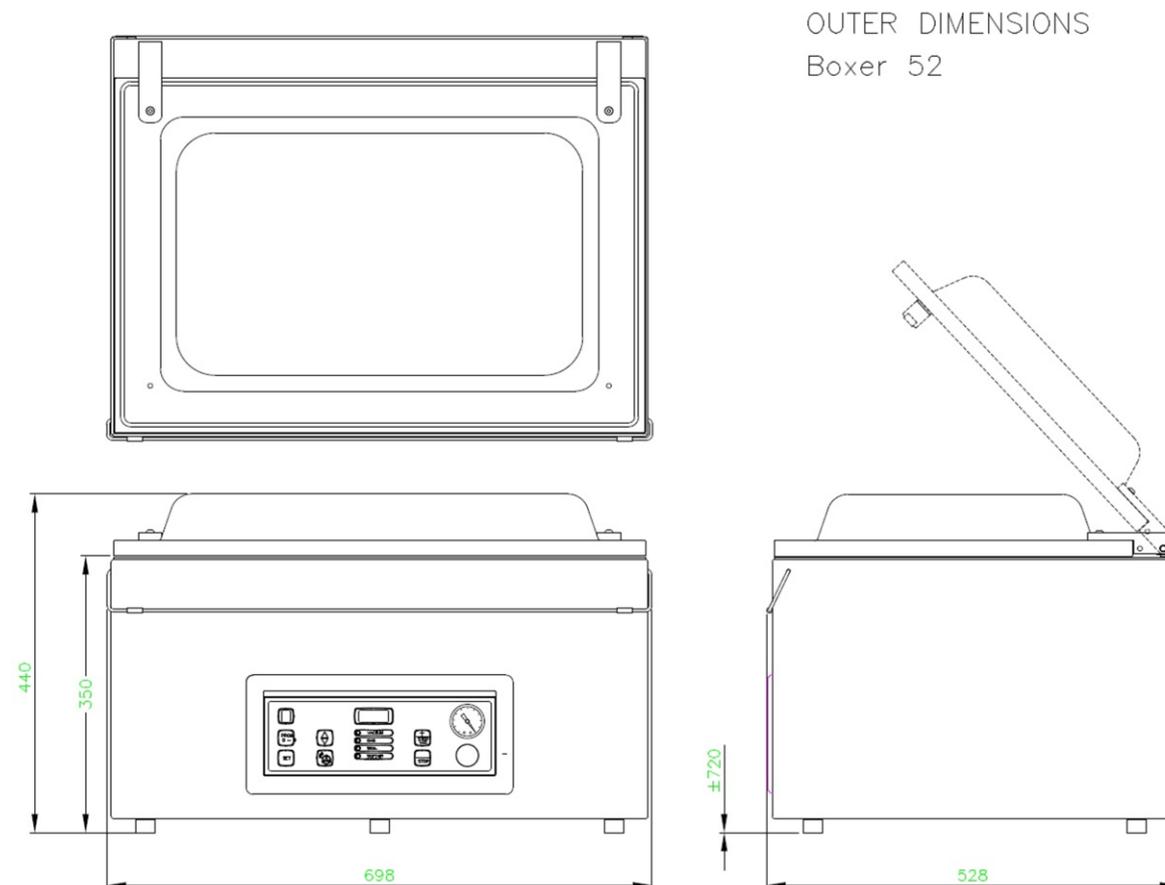

| Model                      | Dimensions (mm)                        |                      | Voltage*<br>(Hz) | Pump<br>capacity<br>(m <sup>3</sup> /h) | Power<br>(kW) | Weight<br>(kg) |
|----------------------------|--|----------------------|------------------|---|---------------|----------------|
|                            | Chamber<br>(usable space)<br>L x W x H | Machine<br>L x W x H |                  |   |               |                |
| Boxer 52II                 | 410 x 520 x 180                        | 528 x 698 x 440      | 230V-1-50        | 21                                      | 0,75 – 1,0    | 81             |
| * Other voltages available |  |                      |                  |   |               |                |



HENKELMAN BV  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands

**Sales support**  
P +31 73 621 36 71  
E [info@henkelman.com](mailto:info@henkelman.com)  
**Service/technical support**  
P +31 73 621 36 71  
E [service@henkelman.com](mailto:service@henkelman.com)