

**POLAR 2-85**

**VACUUM PACKAGING MACHINE**



\*with option automatic lid

**FEATURES**

- Standard with 2 seal bars (front-back): 2 x 840 mm
- Standard double seal (two wires). Optional without extra costs: Cut-off or Wide seal (10 mm)
- Silicone holders easily removable for cleaning and maintenance purposes
- Pump capacity: 300 m<sup>3</sup>/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 10-30 sec
- Soft Air to protect the product and vacuum bag
- Standard Digital control with 10 program memory and Time control
- Flat work plate
- Comes with insert plates for a faster cycle and product adjustment
- Stainless steel exterior
- IP-65 classification

**OPTIONS**

- 1-2 Cut-off/Bi-active seal
- Sensor control, Advanced Control System (ACS), Liquid control
- Automatic lid
- High lid 300 mm, with seal bars 2 x 770 mm
- Gas flush (incl. pressed air connection)
- Preparation for external pump
- Heating element for vacuum valve

**ACCESSORIES**

- Zebra ZD410 thermal label printer (only in combination with ACS)
- Inclined insert plate
- Service kit for standard maintenance


**DESCRIPTION**

The robust, stainless steel Polar 2-85 vacuum packaging machine is standard equipped with a Busch vacuum pump. This double chamber complies with CE standards.



Henkelman offers standard 3 year warranty.

**SEAL BAR CONFIGURATION**




# VACUUM PACAGKING MACHINE POLAR 2-85- SPECS

## VACUUM PACKAGING MACHINE POLAR 2-85 - SPEC SHEET

### DIMENSIONS

In mm

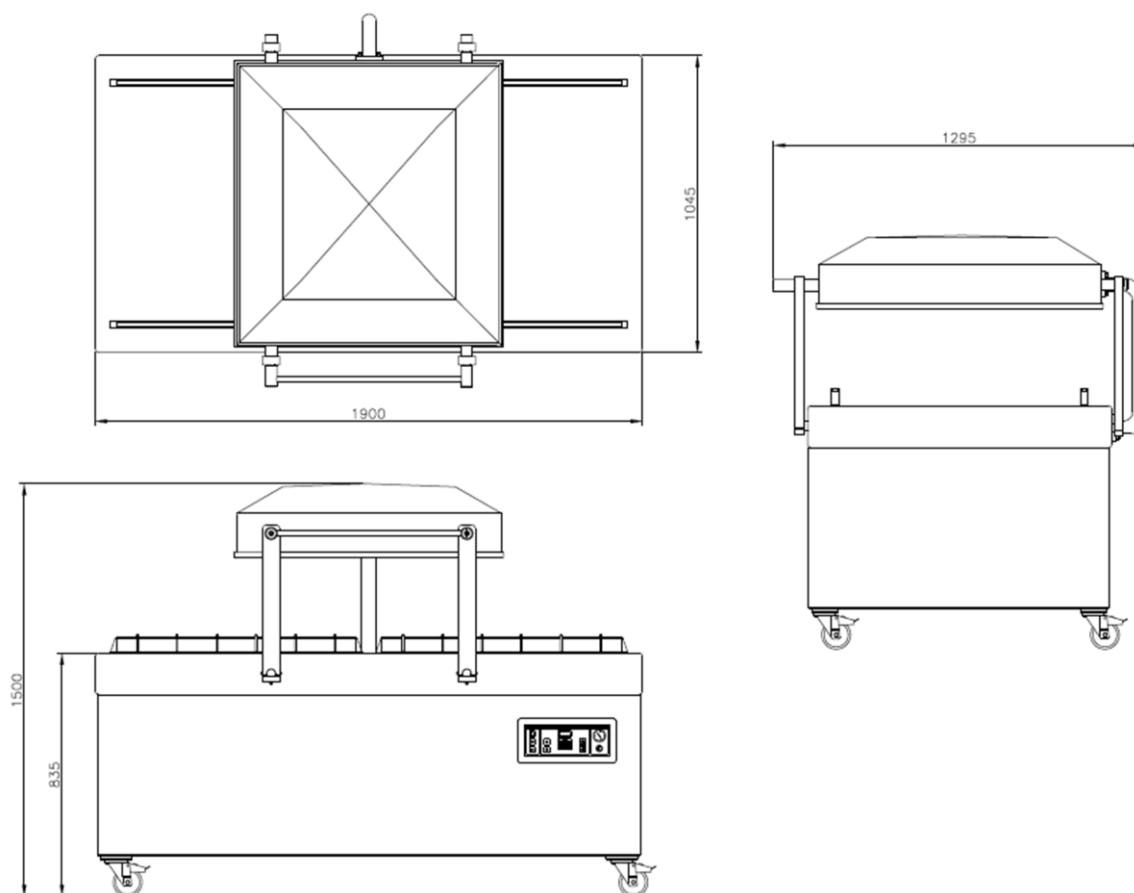

| Model      | Dimensions (mm)                        |                      | Voltage*<br>(Hz) | Pump<br>capacity<br>(m <sup>3</sup> /h) | Power<br>(kW) | Weight<br>(kg) |
|------------|--|----------------------|------------------|---|---------------|----------------|
|            | Chamber<br>(usable space)<br>L x W x H | Machine<br>L x W x H |                  |   |               |                |
| Polar 2-85 | 830 x 840 x 255                        | 1295 x 1900 x 1450   | 400V-3-50        | 300                                     | 7,0 - 9,0     | 685            |

\* Other voltages available



HENKELMAN BV  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands

**Sales support**  
P +31 73 621 36 71  
E [info@henkelman.com](mailto:info@henkelman.com)  
**Service/technical support**  
P +31 73 621 36 71  
E [service@henkelman.com](mailto:service@henkelman.com)